

HOT PIERCED BARS

Meets U.S. 42 code

Art. 42/9/US

Mtl 5/8" sq.

D=3 7/8"

5/8" sq holes

17 holes

Wt. 8.5 lbs

Art. 42/10

Mtl 11/16" sq.

P=6 5/16"

23/32" sq holes

12 holes

Wt. 11 lbs

Art. 42/24

Mtl 11/16" sq.

P=6 5/16"

11/16" sq holes

18 mm

12 holes

Wt. 11 lbs

Meets U.S. 42 code

Art. 42/2/US

Mtl 5/8" dia

D=3 7/8"

5/8" round holes

17 holes

Wt. 7 lbs

Art. 42/4

Mtl 3/4" dia.


P=6 3/4"

3/4" round holes

11 holes

Wt. 11 lbs

Shown: 606/1

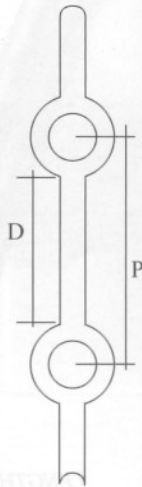

Pierced bar length 78 3/4" Approx.

To be used with 599/4-5-6-7 line.

Art.	Mtl. dia.	P = pitch	inches holes	holes per bar	Wt.
606/1	9/16"	5 1/2"	9/16"	14	5.2 lbs
606/2	5/8"	5 7/8"	5/8"	13	7 lbs
606/3	11/16"	6 5/16"	11/16"	12	9.3 lbs
606/4	3/4"	6 5/8"	3/4"	11	11 lbs



Art. 605/1

Mtl 9/16" sq.

Pitch 5 1/2"

Holes per bar 14

Wt. 6.6 lbs

match for 623/6

Art. 605/3

Mtl 11/16" sq.

Pitch 6 5/16"

Holes per bar 12

Wt. 11 lbs

match for 623/8

Art. 605/2

Mtl 5/8" sq.

Pitch 5 7/8"

Holes per bar 13

Wt. 8.8 lbs

match for 623/7

Art. 605/4

Mtl 3/4" sq.

Pitch 6 5/8"

Holes per bar 11

Wt. 13.8 lbs

match for 623/9

Pierced bar length 78 3/4" Approx.



Shown: 42/9



D = light

P = pitch

To be used with 626 series
HOT PIERCED BAR

Art.	Inches L	P = pitch	inches holes	holes per bar	Wt.
1361/1	1/2"	5 1/2"	1/2"	14	4.9 lbs
1361/2	9/16"	5 7/8"	9/16"	13	7 lbs
1361/3	19/32"	6 5/16"	19/32"	12	8.2 lbs
1361/4	21/32"	5 5/8"	21/32"	11	10.1 lbs

